


## Ultraviolet Water Disinfection Systems from VIQUA

The quality of drinking water can change with time and become contaminated with harmful bacteria. The **PROFESSIONAL family** of compact UV disinfection systems provide a **reliable, economical, and chemical-free** way to safeguard drinking water in any residential or light commercial application. VIQUA's products have been designed and tested to ensure quality drinking water is at everyone's finger tips.

Regardless of your need, there is a VIQUA system to suit your requirements. VIQUA offers systems that range in flow rates from 22 GPM (5 m<sup>3</sup>/hr) up to 46 GPM (10 m<sup>3</sup>/hr) for small businesses and public facilities

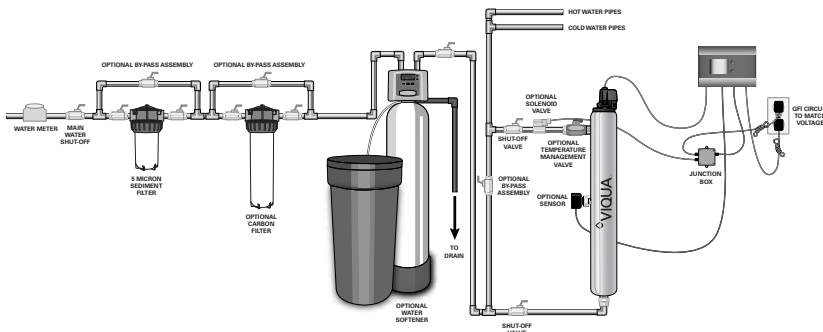

### Features of VIQUA UV water disinfection systems

- Equipped to inactivate chlorine-resistant parasites such as Cryptosporidium and Giardia, harmful bacteria like *E.Coli*, and viruses not visible to the naked eye.
- Specially designed and tested high output lamps provide consistent and reliable ultraviolet output over the entire life of the lamp (9000 hours) to ensure continuous purification, and offer superior performance in a wide range of water conditions.
- The system is easy to maintain and service with easy lamp and cartridge replacement.
- Built with a durable stainless steel chamber to prolong life and eliminate ultraviolet light degradation.

#### VP600, VP950, VP600M & VP950M

- Monitored systems have a specialized 254nm UV intensity sensor which notifies homeowner of changes in UV performance.
- Monitored systems allow for the installation of an optional solenoid valve which will stop the flow of water through the chamber should the UV performance fall below a safe level.

#### E4, F4, E4+, & F4+

- The special lamp plug ensures that no one can power the UV lamp if it's not in the UV chamber (E4+ & F4+ only).
- User friendly sensor ensures safe UV levels are maintained.
- Our high output validated UV lamp is engineered to treat variable water conditions.
- **NEW** LCD controller features a large backlit display for easy reading, simultaneously displaying lamp life remaining, UV Intensity Status (E4+ & F4+ only), support contact information, and lamp replacement reminder that indicates when the lamp needs to be replaced, ensuring continued water safety. The intuitive, user-friendly menu is dealer programmable and allows the user to quickly find the replacement parts needed for the system by using the replacement parts menu, as well as on board quick-reference instructions for system troubleshooting.







Lowest Price Guaranteed on all Viqua UV Systems, Replacement Lamps, Sleeves and Other Parts!

Phone Toll Free 1-866-376-2690

or visit: [www.homepluswater.com](http://www.homepluswater.com)

# Specifications

				
<b>MODEL</b>	VP600M; VP600M; VP600/2; VP600M/2; VP600/2A; VP600M/2A; VP600/2B; VP600M/2B	VP950; VP950M; VP950/2; VP950M/2; VP950/2A; VP950M/2A; VP950/2B; VP950/2B	E4/E4+ (650682; 650718; 650683; 650719)	F4/F4+ (650686; 650720; 650687; 650721)
<b>FLOW RATES</b>				
US Public Health (16 mJ/cm <sup>2</sup> )	40 GPM (150 lpm) (9.0 m <sup>3</sup> /hr)	60 GPM (230 lpm) (13.7 m <sup>3</sup> /hr)	42 GPM (160 lpm) (9.6 m <sup>3</sup> /hr)	45 GPM (170 lpm) (10.2 m <sup>3</sup> /hr)
VIQUA Standard (30 mJ/cm <sup>2</sup> )	30 GPM (113 lpm) (6.7 m <sup>3</sup> /hr)	46 GPM (175 lpm) (10.5 m <sup>3</sup> /hr)	22 GPM (83 lpm) (5 m <sup>3</sup> /hr)	36 GPM (136 lpm) (8.2 m <sup>3</sup> /hr)
NSF/EPA (40 mJ/cm <sup>2</sup> )	22 GPM (83 lpm) (5.0 m <sup>3</sup> /hr)	35 GPM (130 lpm) (7.8 m <sup>3</sup> /hr)	16 GPM (60 lpm) (3.6 m <sup>3</sup> /hr)	27 GPM (102 lpm) (6.1 m <sup>3</sup> /hr)
<b>DIMENSIONS</b>				
Dimensions	30.3" x 3.5" (78 cm x 8.9 cm)	45" x 3.5" (114 cm x 8.9 cm)	30" x 4" (76 cm x 10 cm)	44.25" x 4" (112.5 cm x 10 cm)
Inlet/Outlet Port Size	1" MNPT or BSP	1 1/2" MNPT or BSP	1" NPT	1" NPT
Shipping Weight	19 lbs (8.6 kg)	29 lbs (13.1 kg)	13 lbs (5.9 kg)	18 lbs (8.2 kg)
<b>ELECTRICAL</b>				
Voltage	100-240V / 50-60 Hz	100-240V / 50-60 Hz	100-240V / 50-60 Hz	100-240V / 50-60 Hz
Power Consumption	70 W	95 W	83 W	130 W
Maximum Operating Pressure	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)	125 psi (8.62 bar)
Ambient Water Temperature	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)	2-40°C (36-104°F)
<b>FEATURES</b>				
Visual "Power On"	YES	YES	YES	YES
Chamber Material	304 SS	304 SS	304 SS	304 SS
Visual Lamp Life Remaining	YES	YES	YES	YES
Audible Lamp Failure	YES	YES	YES	YES
Audible Lamp Replacement Reminder	YES	YES	YES	YES
Solenoid Valve	Optional - VP600M	Optional - VP950M	Optional	F4+
UV Sensor	VP600M	VP950M	E4+	E4+

## Replacement Parts

<b>602806</b> – UV lamp for E4 & E4+	<b>602733</b> – quartz sleeve for E4 & E4+
<b>602807</b> – UV lamp for F4 & F4+	<b>602734</b> – quartz sleeve for F4 & F4+
<b>S600RL-HO</b> – UV lamp for VP600 & VP600M	<b>BA-ICE-C</b> – controller for VP600 & VP950
<b>S950RL-HO</b> – UV lamp for VP950 & VP950M	<b>BA-ICE-CM</b> – controller for VP600M & VP950M
<b>QSO-600</b> – quartz sleeve for VP600 & VP600M	<b>650713-007</b> – controller E4, E4+, F4 & F4+
<b>QSO-950</b> – quartz sleeve for VP950 & VP950M	<b>650703</b> – sensor for E4+ & F4+


## Water Quality Parameters

Hardness: < 7 grains (120 mg/L)

Iron: < 0.3 mg/L

Tannins: < 0.1 mg/L

**VP600M, VP950M, E4, E4+, F4, & F4+ DOSE CURVES (@ 95% UVT)**

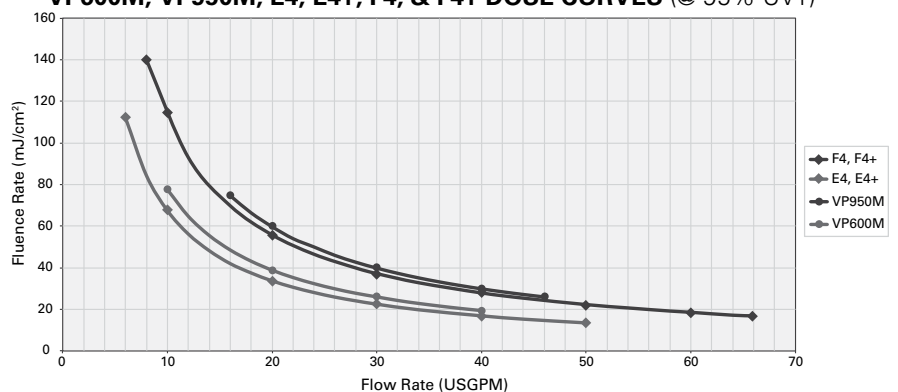

425 Clair Rd. W, Guelph, Ontario, Canada N1L 1R1

t. 1.519.763.1032 • f. 1.519.763.5069 • tf. 1.800.265.7246 (US/CAN) • t. +31.73.747.0144 (EUR)

• info@viqua.com • www.viqua.com

