

PENTEK POLYDEPTH SERIES

POLYPROPYLENE CARTRIDGES

MULTIPLE MICRON RATINGS FOR A WIDE VARIETY OF APPLICATIONS



Pentair Pentek[®] Polydepth[®] Filtration Cartridges are constructed of thermally bonded polypropylene microfibers to ensure high efficiency. The filter incorporates a rigid polypropylene center core for increased collapse strength and durability. This thermal bonded micro-fiber construction has minimal fiber release, consistent flow rate and superior filtration performance. It also is not brittle or prone to breakage problems like resin-bonded cartridges.

Unique micro-grooves provide added surface area. The Polydepth Cartridge will not impart taste, odor or color to the liquid being filtered, which makes it ideal for food and beverage applications. The recommended temperature limit of 40-175°F (4.4-79.4°C) allows it to be used in many hot water applications. Additionally, the polypropylene construction provides superior chemical resistance and is not prone to bacterial attack.

Available in different lengths from 9.75" up to 40". Unlike competitive cartridges, the longer lengths are not manufactured by gluing shorter cartridges together. They are continuous cartridges that cannot separate during use and do not sacrifice filtering surface area.

FEATURES/BENEFITS

Thermally bonded polypropylene micro-fiber construction for higher filtration efficiency
 Consistent flow rate and superior filtration performance
 Will not impart taste, odor or color to water being filtered

Ideal for a wide variety of industrial filtration
 Nominal 1, 5, 10, 25, 50 micron rating
 Lengths: 10", 20", 30", 40"

SPECIFICATIONS

Filter Media – Polypropylene

Temperature Rating – 40-175°F (4.4-79.4°C)




PD-1-934, PD-5-934, PD-10-934, PD-25-934, PD-50-934, PD-1-20, PD-5-20, PD-10-20, PD-25-20 and PD-50-20 are Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

SPECIFICATIONS AND PERFORMANCE

| MODEL # | PART # | MAXIMUM DIMENSIONS | RATING* (NOMINAL) | INITIAL ΔP (PSI) @ FLOW RATE (GPM) |
|-----------|-----------|--------------------------------|-------------------|---------------------------------------|
| PD-1-934 | 155748-43 | 2.32" x 9.88" (59 mm x 251 mm) | 1 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-5-934 | 155749-43 | 2.32" x 9.88" (59 mm x 251 mm) | 5 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-10-934 | 155750-43 | 2.32" x 9.88" (59 mm x 251 mm) | 10 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-25-934 | 155751-43 | 2.32" x 9.88" (59 mm x 251 mm) | 25 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-50-934 | 155752-43 | 2.32" x 9.88" (59 mm x 251 mm) | 50 micron | <2 psi @ 2 gpm (<0.14 bar @ 7.6 Lpm) |
| PD-1-20 | 155755-43 | 2.32" x 20" (59 mm x 508 mm) | 1 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-5-20 | 155756-43 | 2.32" x 20" (59 mm x 508 mm) | 5 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-10-20 | 155757-43 | 2.32" x 20" (59 mm x 508 mm) | 10 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-25-20 | 155758-43 | 2.32" x 20" (59 mm x 508 mm) | 25 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-50-20 | 155759-43 | 2.32" x 20" (59 mm x 508 mm) | 50 micron | <2 psi @ 5 gpm (<0.14 bar @ 19 Lpm) |
| PD-1-30 | 155762-43 | 2.32" x 30" (59 mm x 762 mm) | 1 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-5-30 | 155763-43 | 2.32" x 30" (59 mm x 762 mm) | 5 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-10-30 | 155764-43 | 2.32" x 30" (59 mm x 762 mm) | 10 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-25-30 | 155765-43 | 2.32" x 30" (59 mm x 762 mm) | 25 micron | <2 psi @ 7 gpm (<0.14 bar @ 26.5 Lpm) |
| PD-1-40 | 155769-43 | 2.32" x 40" (59 mm x 1016 mm) | 1 micron | <2 psi @ 9 gpm (<0.14 bar @ 34 Lpm) |
| PD-5-40 | 155770-43 | 2.32" x 40" (59 mm x 1016 mm) | 5 micron | <2 psi @ 9 gpm (<0.14 bar @ 34 Lpm) |
| PD-25-40 | 155772-43 | 2.32" x 40" (59 mm x 1016 mm) | 25 micron | <2 psi @ 9 gpm (<0.14 bar @ 34 Lpm) |

*Not Performance Tested or Certified by NSF

PD Series Pressure Drop vs. Flow Rate

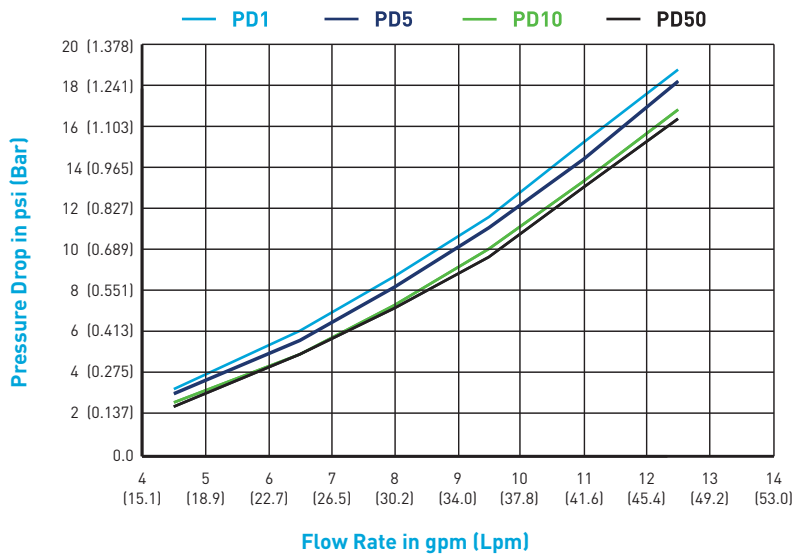

Data shown reflects the performance of 10" cartridges. 20", 30" and 40" cartridge pressure drops can be estimated by dividing the psi above by 2, 3 and 4 respectively at the same flow rate.



WATER QUALITY SYSTEMS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209

P: 262.238.4400 | F: 262.238.4404

WATERPURIFICATION.PENTAIR.COM

CUSTOMER CARE: 800.279.9404 | tech-support@pentair.com

© 2016 Pentair Residential Filtration, LLC. All rights reserved.

§For a detailed list of where Pentair trademarks are registered, please visit waterpurification.pentair.com/brands.

Pentair trademarks and logos are owned by Pentair plc or its affiliates. Third party registered and unregistered trademarks and logos are the property of their respective owners.

310094 REV D SE16